


ReForm Legend Ecotrust

Produktbeskrivelse

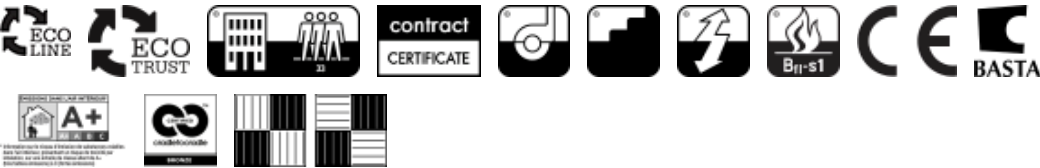

ege

THE URGE TO EXPLORE SPACE

| Produktbeskrivelse | Metoder | Produktdata |
|--------------------------------|------------------------------------|----------------------------------|
| Konstruktion | | |
| Struktur | ISO 2424 | Tuftet loop pile strukturvævet |
| Gauge | ISO 2424 | 1/12 |
| Luvmateriale | DIR 96/73, 96/74 | 100% regenerated Econyl PA6 |
| Farvemethode | - | Millitron farvet |
| Bagside | eTL | Ecotrust 350, 100% recycled |
| Dimensioner | ISO 3018 | 48x48/96x96/24x96cm/Figura |
| Dimensionstabilitet fliser | EN 986 | <0,2% |
| Totalhøjde | ISO 1765 | Ca. 8,5 mm. |
| | . | 0.34" |
| Slidlag | ISO 1766 | Ca. 4,0 mm. |
| Noppeantal | ISO 1763 | Ca. 213.000 pr.m2 |
| Totalvægt | ISO 8543 | Ca. 3.050 g/m2 |
| | . | 89.9 oz./yd2 |
| Luvindsatsvægt | eTL | 950 g/m2 |
| | . | 28.03 oz./yd2 |
| Luvdensitet | ISO 8543. | Ca. 0,175 g/cm3 |
| Biocidal treatment | Biocidal Product Regulation | Contains preser.to antagonize |
| Egnethedsprøvnninger | | |
| Brugsområder | EN 1307 | 33 - Erhverv - Kraftig brug |
| Garanti | eTL | Contract certifikat |
| Brugsområder | Gulvbranchen | Klasse 33 |
| Rullehjulsegnet | EN 985 | Ja, konstant brug |
| Trappeegnet | EN 1963 | Ja |
| Antistatiske egenskaber | eTL | Permanent antistatisk |
| Personopladning | ISO 6356 | Antistatisk |
| Trinlydsdæmpning | ISO 717-2 | 27 dB |
| Akustisk absorption | ISO 354 | 0,30 aW |
| Gulvarmeegnet | eTL | Ca. 0,15 m2K/W |
| Lysrefleksion | eTL | Testrapport |
| Lysægthed | ISO 105-B02 | >5 |
| | AATCC 16 | 5.0 |
| Gnideægthed våd | ISO 105-X12 | >3 |
| | AATCC 165 | 5.0 |
| Gnideægthed tør | ISO 105-X12 | >3-4 |
| | AATCC 165 | 5.0 |
| Vandægthed mønstrede/melerede | ISO 105-E01 | >4 |
| Cleaning | AATCC 138 | 5.0 |
| Colour fast.Oxides of nitrogen | AATCC 164 | 4.0 |
| Øvrige brugstests | ASTM D5252 Hexapod | 4.0/ 4.5 |
| | - | Commercial - Heavy |
| | AATCC 134 Electrostatic propensity | 3.5 kV |
| Sikkerhed & Miljø | | |
| Brandklassifikation | VKF/AEAI | Godkendt |

| Produktbeskrivelse | Metoder | Produktdata |
|-----------------------------|--------------------------------|----------------------|
| CE Mærkning | ASTM E-648 | Class 1 |
| | ASTM E662 Smoke Density | <450 |
| | ASTM D2859 Surface Flamm. | Pass |
| | EN 13501-1 Euroclass | Bfl-s1 |
| | EN 14041 | Certificeret |
| | CPR | 1021-CPR-010-1/16 |
| | Ydeevnedeklaration | DOP 5B-PA-ECT350 |
| | Notified body no. | 1021 |
| | Ce Year | 14 |
| | Content of PCP EN 12673 | DL |
| Indeklima | Formaldehyde emission | NA |
| | Skridsikkerhed EN 13893 | Class DS |
| | M1 | Med ECTA bagside |
| | RUSLAND | Godkendt |
| | BASTA | Registreret |
| | Green Label Plus | Godkendt |
| | Emissions dans l'air intérieur | A+/A+ |
| | Indoor Air Comfort Gold | Group 3 |
| | ABG | ABG-28-01-03-03-2018 |
| | Miljø | BRE |
| BREEAM-NOR | | Med ECTA bagside |
| Environmental Product Decl. | | 20150334-CCA1-EN |
| Cradle To Cradle Certified | | Bronze certified |
| Recycled Content, ISO 14021 | | Ca. 47,0 % |
| Recycled Content for LEED | | Ca. 39,0 % |
| LEED | | Qualified |

Vejledninger

| | | |
|---------------------------|-----------------|--------------------------|
| Montering, inkl. limguide | DK | Dansk |
| | N | Norsk |
| | S | Svensk |
| | GB | English |
| | D | Deutsch |
| | F | Francais |
| Montering fliser | Lægningsretning | Quarter turn/ monolithic |
| Rengøring, pletfjerning | DK | Dansk |
| | N | Norsk |
| | S | Svensk |
| | GB | English |
| | D | Deutsch |
| | F | Francais |

Producent

| | | |
|-----------------------|-----------|-----------------------------|
| Fabriks certificering | ISO 9001 | Audited and verified by BVC |
| | ISO 14001 | Audited and verified by BVC |
| | EMAS | Audited and verified by BVC |
| | DS/OHSAS | Audited and verified by BVC |
| | DS 49001 | Audited and verified by BVC |



THE URGE TO EXPLORE SPACE

| Produktbeskrivelse | Metoder | Produktdata |
|--------------------|---------|----------------------------------|
| | CRuk | Member of Carpet Recycling UK |

ege

THE URGE TO EXPLORE SPACE